





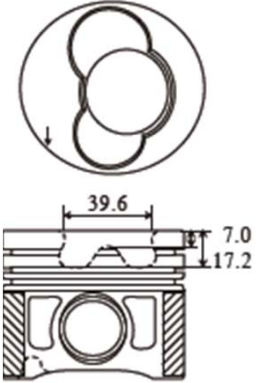
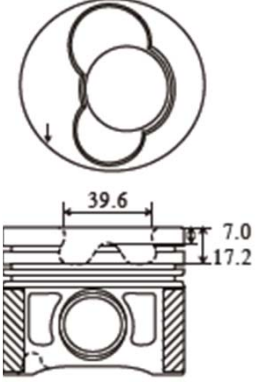
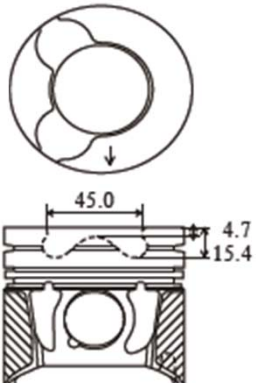


ENGINE MODEL	PISTON KIT piston set+rings	PISTON SET piston+pin+clips	PISTON RINGS piston rings set	PISTON HEAD
D 24 TD D 24 TIC TURBO 6 cyls 76.5 mm bore 2,383 cc	DPKV607651A	DPNV607651A	DRSV607651	 
	ALFIN HEAD ANODIZED FITS TAPERED CON.ROD K-90732600 M-0297900 N-8710980010	length(STD) 71.7 length(O/S) 71.45 comp.(STD) 41.7 comp.(O/S) 41.45 height -1.6 pin = 24.0 × 64.0	top 1.75 2nd 2.0 oil 3.0 A-R43850 A-R45270 G-0810950000 G-0810980000 K-800000610000 M-02954N0 M-02955N0	
	piston stock size 0.00 (STD) ⊙ 0.50 (020) ⊙ 1.00 (040) ⊙			
D 24 6 cyls 76.5 mm bore 2,383 cc	DPKV607652A	DPNV607652A	DRSV607651	 
	ALFIN K-93260600 M-0295500 N-8710950000	length 71.7 comp. 41.7 height -1.6 pin = 24.0 × 64.0	top 1.75 2nd 2.0 oil 3.0 A-R43850 A-R45270 G-0810950000 G-0810980000 K-800000610000 M-02954N0 M-02955N0	
	piston stock size 0.00 (STD) ⊙ 0.50 (020) ⊙ 1.00 (040) ⊙	272 032 272 072		
D 19 T D 4192 T 4 cyls 80.0 mm bore 1,870 cc	DPKV408001B	DPNV408001B	DRSV408001	 
	ALFIN OIL GALLERY A-A350542 N-8710350000	length 66.69 comp. 41.71 height -0.8 -1.7 pin = 26.0 × 66.5	top 2.5 2nd 2.0 oil 3.0 A-R60260 G-0810150000 K-800036140000 M-02158V0	
	piston stock size 0.00 (STD) ⊙ 0.25 (010) 0.50 (020) ⊙			

ENGINE MODEL	PISTON KIT piston set+rings	PISTON SET piston+pin+clips	PISTON RINGS piston rings set	PISTON HEAD
D5252 T 5 cyls 81.0 mm bore 2,461 cc	DPKVV10810AA (for cyl 1/2)	DPNVV10810AA (for cyl 1/2)	DRSVW108101	
	ALFIN SKIRT MOS2 TREATED PIN BOSS GAP=22.2mm	length(STD) 69.75 length(0/S) 69.5 comp.(STD) 45.75 comp.(0/S) 45.5 height -7.0	top 2.5 2nd 2.0 oil 3.0	
	K-94429700 M-0349000 N-8750150020	pin = 26.0 × 68.0 PIN BUSHING INSERTED	A-R60330 G-0842100000 G-0850150000 K-800001150000 K-800073910000 M-03048N0 M-03490N0	
piston stock size 0.00 (STD) ⊙ 0.50 (020) ⊙				
D5252 T 5 cyls 81.0 mm bore 2,461 cc	DPKVV10810BA (for cyl 3/4/5)	DPNVV10810BA (for cyl 3/4/5)	DRSVW108101	
	ALFIN SKIRT MOS2 TREATED PIN BOSS GAP=22.2mm	length(STD) 69.75 length(0/S) 69.5 comp.(STD) 45.75 comp.(0/S) 45.5 height -7.0	top 2.5 2nd 2.0 oil 3.0	
	K-94430700 M-0349100 N-8750150030	pin = 26.0 × 68.0 PIN BUSHING INSERTED	A-R60330 G-0842100000 G-0850150000 K-800001150000 K-800073910000 M-03048N0 M-03490N0	
piston stock size 0.00 (STD) ⊙ 0.50 (020) ⊙				
D 4204 T 4 cyls 85.0 mm bore 1,998 cc	DPKVV408501B	DPNVV408501B	DRSVV408501	
	ALFIN OIL GALLERY SKIRT MOS2 TREATED FITS TAPERED CON.ROD	length 80.7 comp. 46.7 height -4.7	top(DK) 3.5 2nd 2.0 oil 3.0	
	K-99700600	pin = 28.0 × 70.0	A-R60410 G-0811470000 K-800045940000 M-03999N0	
piston stock size 0.00 (STD) ⊙ 0.60 (024) ⊙				

ENGINE MODEL	PISTON KIT piston set+rings	PISTON SET piston+pin+clips	PISTON RINGS piston rings set	PISTON HEAD
TD63E/ES TD63KBE/KDE TD63KEE/KFE TURBO 6 cyls 98.43 mm bore 5,480 cc	DPKVV609841A	DPNVV609841A	DRSVV609841	
	ALFIN FITS TAPERED CON.ROD	length 124.4 comp. 79.4 height -20.3	top(DK) 3.5 2nd 2.5 oil 3.5	
	A-A350835 K-99991700 M-0383400 N-8714250000	pin = 40.0 × 77.3	A-R45750 G-0814250000 K-800042210000 M-03838N0	
piston stock size 0.00 (STD)				
4.236 4 cyls 98.48 mm bore 3,864 cc	DPKVV409851A	DPNVV409851A	DRSVV409851	
	ALFIN HEAD ANODIZED SKIRT MOS2 TREATED	length 121.0 comp. 70.3 height -20.5	top 2.385 2nd 2.385 oil 4.747	
	K-93592600 M-0433100	pin = 34.93 × 84.0	A-R34740 G-0831890010 K-800033710000 M-04331N0	
piston stock size 0.00 (STD)				